



DISPENSERS



PUMPS



METERS



NOZZLES



FILTRATION

FLUID  
MONITORING

# A60 / A80 / A120

## FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Among the range of nozzles for fuel dispensing, PIUSI A60/A80/A120 consist of a range of automatic devices for flow rates up to 120 l/min fitted with an inner device that automatically stops the fluid dispensing when the tank is full. These nozzles also include a swivel connector.

## PERFORMANCE

UP TO

**120 L/MIN**

FLOW-RATE

**1" BSP**

INLET

**24MM**

OD SPOUT

A60

**29MM**

OD SPOUT

A80/A120



## PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX		
FO0603060	1,25	2,76	36OX36OX280	14X14X11	1		
FO0602020	1,20	2,65	36OX36OX280	14X14X11	1		
FO0604030	1,93	4,25	36OX36OX280	14X14X11	1		
FO0610020	1,93	4,25	36OX36OX280	14X14X11	1		
FO0613A00	1,30	2,87	36OX36OX280	14X14X11	1		
FO0614A00	1,65	3,64	36OX36OX280	14X14X11	1		
FO0602030	1,25	2,76	36OX36OX280	14X14X11	1		
FO0870010	1,70	3,74	36OX36OX280	14X14X11	1		



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



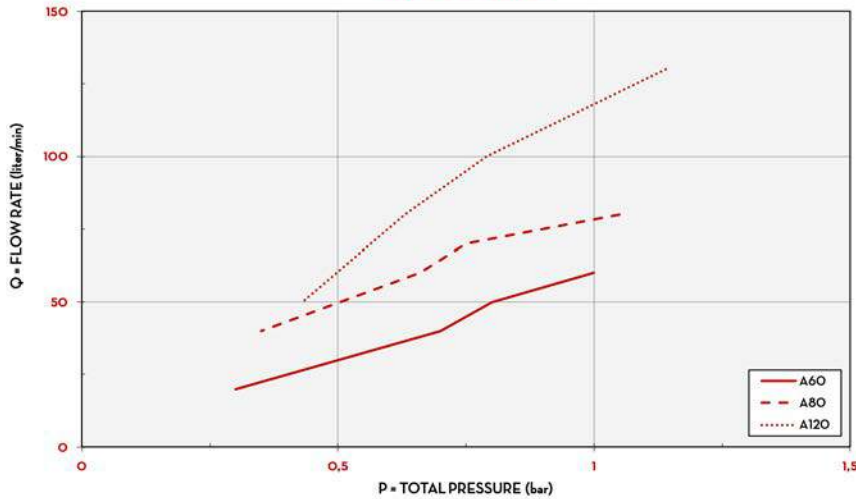
OIL



WATER



WINDSCREEN

**CHART****A60 - A80 - A120**

**TYPE OF FLUID** DIESEL  
**TEMPERATURE** 20-25-10 °C

**IN THE BOX**

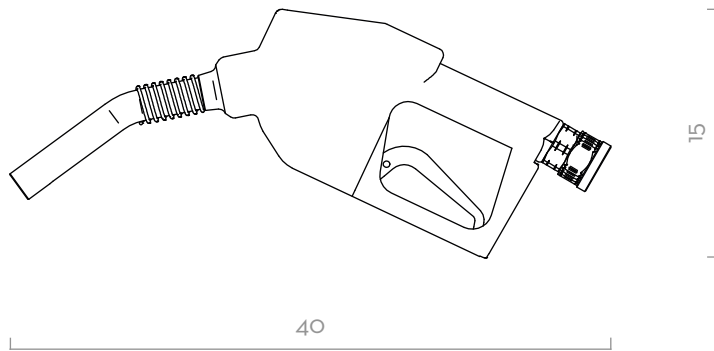
- A60/A80/A120 NOZZLE
- INSTRUCTION MANUAL

**DETAILS**

AUTOMATIC STOP



F 1" SWIVEL

**DIMENSIONS**

Dimensions expressed in millimeters

**MATERIALS**

- BODY: ALUMINIUM
- SEAL: VITON

**TECHNICAL DATA**

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		INLET		SPOUT
			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
FO0603060	A60	D G	70	19	F 3/4"	F 1"	24
FO0602020	A60 UNLEADED	D G	60	16	F 3/4"	F 1"	20
FO0604030	A80	D G	90	24	F 1"	F 1"	29
FO0610020	A120	D G	120	32	F 1"	F 1"	29
FO0613A00	A60 - EN 13012	D	70	19	F 3/4"	F 1"	24
FO0614A00	A120 - EN 13012	D	120	32	-	F 1"	29
FO0602030	AUTOMATIC NOZZLE RAPSOIL	B	60	16	F 3/4"	F 1"	24
FO0870010	A60 + K24 PLASTIC BLACK	D	70	19	-	F 1"	24

**A60 / A80 / A120**