


## PO550 TITAN



CAPACITY:	5500 kg
WHEEL FREE LIFT:	3200 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	2,2 kW
TOTAL HEIGHT:	2343 mm
LIFTING HEIGHT:	1960 mm
CLEARANCE:	3088 mm
PLATFORMS:	650x5455 mm
NOISE LEVEL:	<70 dB (A)
WEIGHT:	2370 kg

**4-column lifts with a wheel free lift** • Mechanical synchronization by means of steel ropes  
 • Automatic mechanical lock released pneumatically • Lift **adapted to handle geometry**, has **recesses for turntables** and **expansion plates** • Overload valve • **Safe controlled lift voltage of 24V** • The product is homologated and certified in accordance with European standards Directive EN1493: 2010


### STANDARD EQUIPMENT

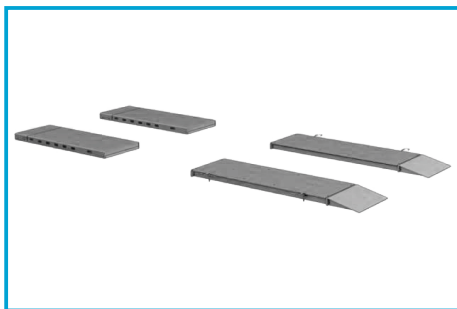


### RECESSES FOR TURNTABLES



### WHEEL FREE LIFT

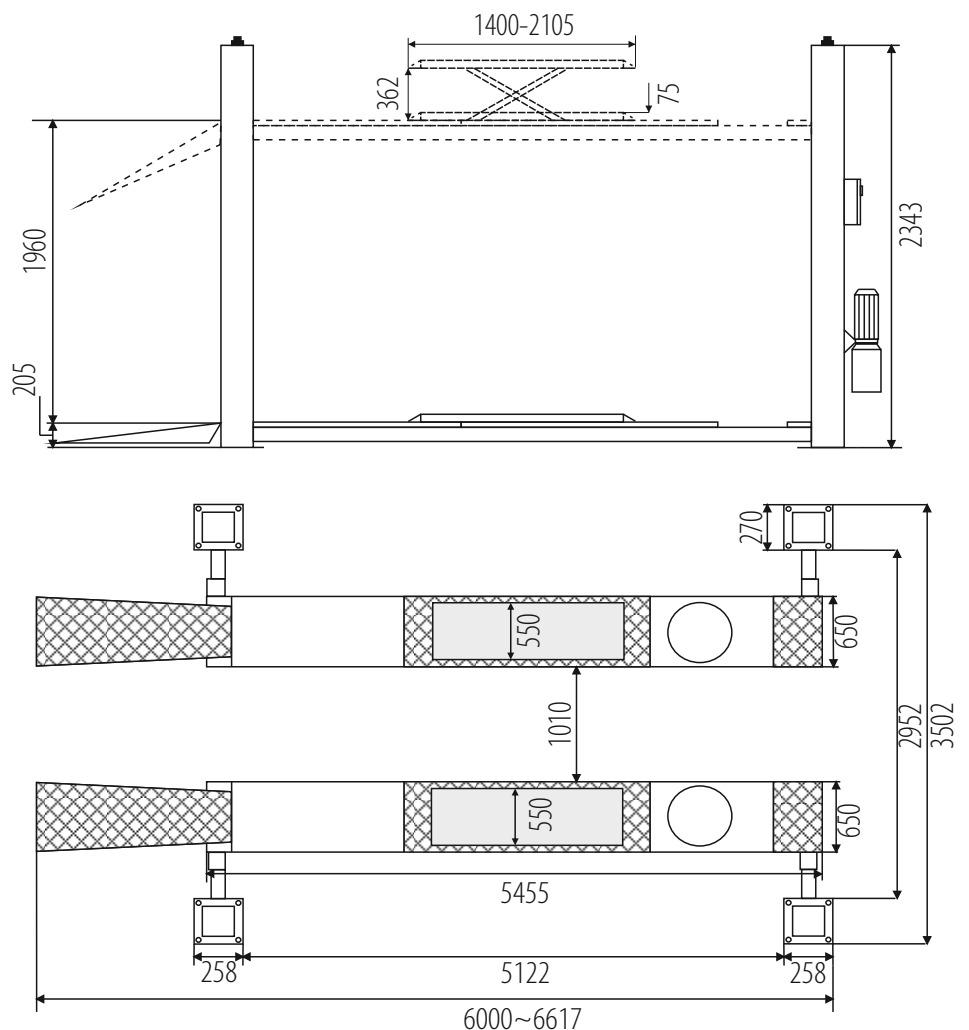

## P0550 TITAN

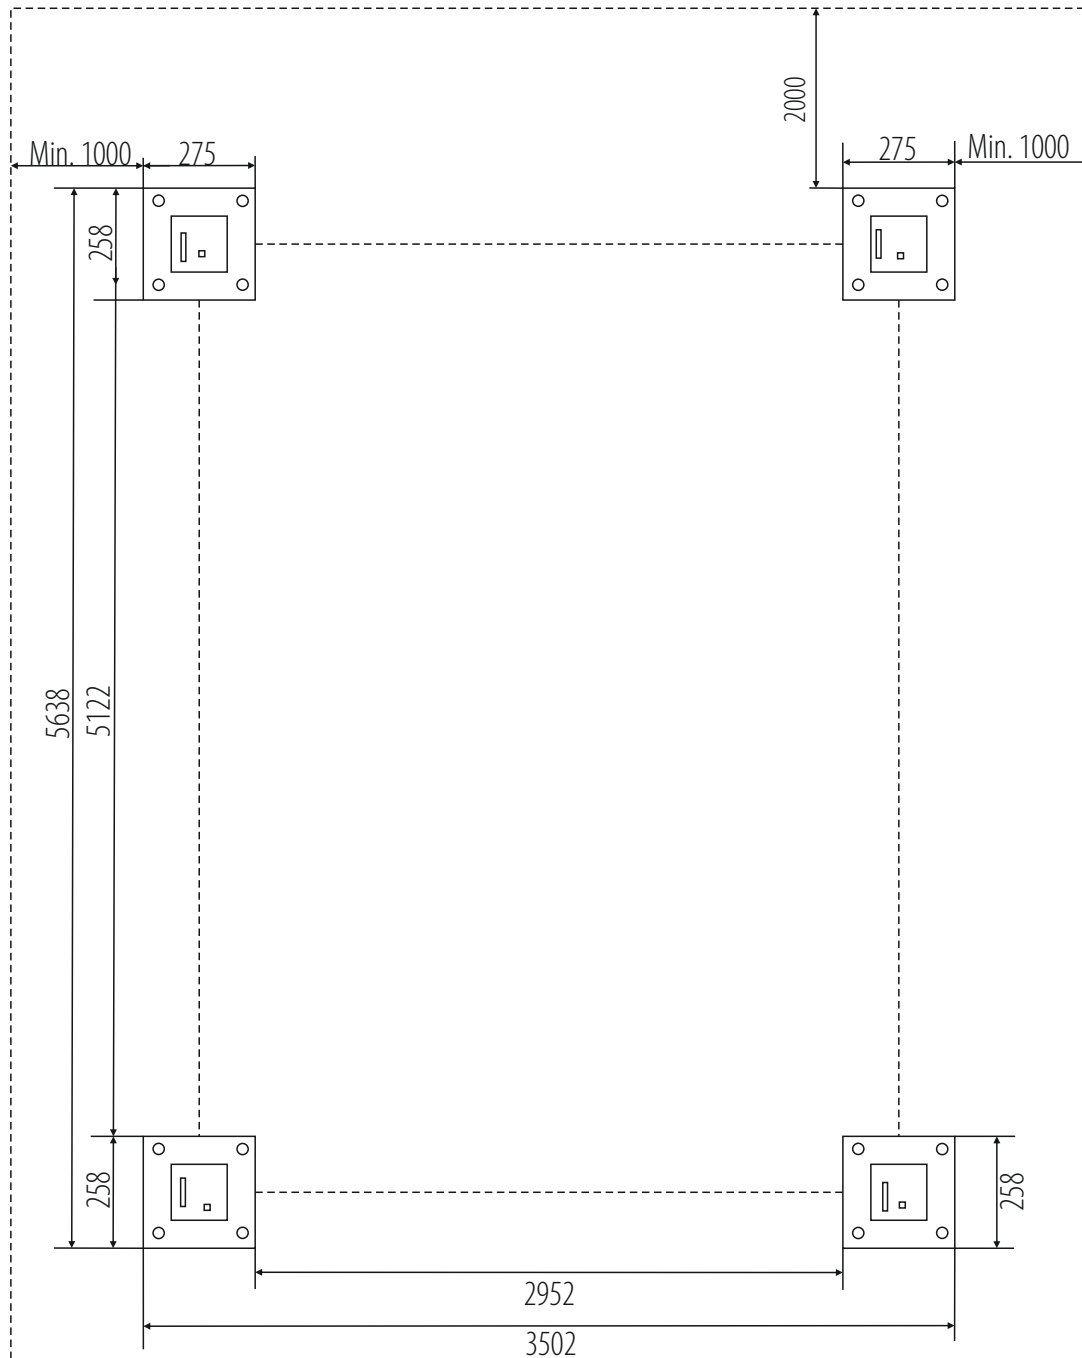

### INSTALLATION REQUIREMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 6100x4000x300 mm ♦ Acceptable floor imbalance: +/- 5mm, floor execution: 3 weeks before assembly ♦ Mounting anchors: mechanical M12 / 150 mm 16 pieces or chemical M16 / 250mm ♦ Hydraulic oil: HL22, 18.0l ♦ Power supply: 5x2.5mm cable to the place of assembly ♦ Current protection: min. 32A with 3-phase 400V / 50Hz power supply.

Installation allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm<sup>2</sup> ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.