

SUPER-SCREW®



PATENTED PRODUCT

MADE IN FRANCE

Lacings / Heavy Industries

100% COMPATIBLE WITH
BELT CLEANERS, BELT TRACKERS AND
TRANSFER POINTS FROM OUR RANGE*



MLT : inventor and manufacturer of the first

FLEXIBLE SPLICE TO SCREW



the *Original*
since
1994

5 generations of flexible splice to screw



Splice your belt simply with screws !

MLT is the original inventor and manufacturer of the **SUPER-SCREW®**, the only flexible screw splice, created in 1994. Our desire to go further in innovation and to always meet your needs has led the **MLT** teams to create new generations of **SUPER-SCREW®**.

When on-site, you are regularly exposed to field-based issues :

- need to minimize machine downtime as much as possible,
- difficult condition of access, harsh climatic conditions, challenged staff safety,
- overinvestment,
- need for skilled technicians leading to a lack of autonomy of the local staff, etc.

Screws allow the **SUPER-SCREW®** splice to be installed regardless of :

- the configuration of the conveyor,
- the conditions of access,
- weather conditions,
- temperature (from -80°C (-112°F) to 200°C (392°F) peak).

Furthermore, the screws are specifically designed as self-drilling and self-tapping : they separate the belt fibres without cutting.

This feedback inspires **MLT** teams on a daily basis, and makes them think about improving our products to offer you solutions that are always at the cutting edge of innovation. Based on these observations, **MLT** teams have developed a new generation of **SUPER-SCREW®**, unique and innovative splicing solutions for conveyor belts :

The **SUPER-SCREW®** range is performant, innovative and easy to install!



CORDLESS TOOL KIT WITH SKIVER AND DRIVER

SUPER-SCREW® RANGE

A wide choice for all your needs

5 UNIQUE SPLICES ON THE MARKET

In order to meet all your needs, the MLT teams have developed the SUPER-SCREW® range.

The inventor of the first flexible screw splice, the SUPER-SCREW®, offers you a wide range of choices for your screw splice system.

Discover a range of simple and fast splicing systems to meet all needs, constraints and requirements.

Find the SUPER-SCREW® splice that's right for you!



SUPER-SCREW®
PRIMARY

Entry range



Temporary solution

Abrasion resistant (150 mm³)

Packaging :

available in roll of 25 m only

Includes:

- Spacers / 1 screw size / PZ bit



SUPER-SCREW®
ORIGINAL

The historical product



Permanent solution

Abrasion resistant (50 mm³) | Heat resistant
| Fire resistant | Oil resistant | Heat
retardant | Very low temperature

Packaging :

- 85 - 105 : In roll of 5, 7.5 and 15 m.
- 125 - 250 : In roll of 3, 5, 10 and 15 m.
- In Kit, pre-assembled and cut to length, for belt widths of 800, 1000, 1200, 1400, 1600 mm.

Includes:

- Installation tools
- customization*

Type	Thickness of the splice	
	Top	Bottom
35	4 mm (1/8")	3.7 mm (1/8")
63	5 mm (3/16")	4 mm (1/8")
80	6 mm (1/4")	5 mm (3/16")

Type	Thickness of the splice	
	Top	Bottom
85	7.5 mm (5/16")	4.5 mm (3/16")
100	7.5 mm (5/16")	4.5 mm (3/16")
105	9 mm (3 1/8")	4.5 mm (3/16")
125	6.5 mm (1/4")	6 mm (1/4")
127	8.5 mm (5/16")	6 mm (1/4")
140	6.5 mm (1/4")	6 mm (1/4")
145	8.5 mm (5/16")	6 mm (1/4")
160	6.5 mm (1/4")	6 mm (1/4")
165	8.5 mm (5/16")	6 mm (1/4")
180	6.5 mm (1/4")	6 mm (1/4")
185	8.5 mm (5/16")	6 mm (1/4")
200	8.5 mm (5/16")	6 mm (1/4")
205	10 mm (3/8")	6 mm (1/4")
250	10.5 mm (7/16")	8 mm (5/16")



The new generation



Permanent solution

Abrasion resistant (50 mm³) | Heat resistant |
Fire resistant | Oil resistant | Heat retardant |
Very low temperature | Food white

Packaging :

- In roll of 3 or 5**, 10 and 25 m
- In Kit, pre-assembled and cut to length, for belt widths of 500, 650, 800, 1000, 1200 mm.
- White food grade version available in 2000 mm length only

Includes:

- Installation tools
- customization*

Type	Thickness of the splice	
	Top	Bottom
35	3.5 mm (1/8")	3 mm (1/8")
50	4 mm (1/8")	3 mm (1/8")
63	6 mm (1/4")	3 mm (1/8")
80	6 mm (1/4")	4.7 mm (3/16")



The security (Security indicator)



Permanent solution

Abrasion resistant (50 mm³) | Heat resistant |
Fire resistant | Oil resistant | Heat
retardant | Very low temperature

Packaging :

- 65 - 100 : In roll of 3 or 5**, 10 and 25 m.
- 105 : In roll of 3 or 5**, 10 and 15 m.
- In Kit, pre-assembled and cut to length, for belt widths of 650, 800, 1000, 1200, 1400 mm.

Includes:

- Installation tools
- customization*

Type	Thickness of the splice	
	Top	Bottom
65	6 mm (1/4")	3 mm (1/8")
85	8 mm (5/16")	4.7 mm (3/16")
100	8 mm (5/16")	4.7 mm (3/16")
105	10 mm (5/16")	4.7 mm (3/16")



High performance (Polyurethane)



Permanent solution

Abrasion resistant (15 mm³) | Oil resistant

Packaging :

- In Kit, pre-assembled and cut to length, for belt widths of 650, 800, 1000, 1200, 1400, 2000, 3000 mm.

Includes:

- Installation tools
- Spacers / 2 screw sizes / PZ bit
- customization*
- Easy Screw Solution

Type	Thickness of the splice	
	Top	Bottom
65	6 ou 8 mm (1/4 or 5/16")	3 mm (1/8")
85	8 ou 10 mm (5/16")	4.7 mm (3/16")
105	8 ou 10 mm (5/16")	4.7 mm (3/16")

*Reserved for partners contracts

**3 or 5 m depending on the top cover type, please consult us.

SUPER-SCREW®

P R I M A R Y

Temporary solution



In order to give everyone access to **SUPER-SCREW®** quality and technology, **MLT** teams have created the **SUPER-SCREW® PRIMARY**, the French-made flexible screw joint accessible to everybody.

This temporary splice will allow you an easy installation in any situation in only 2 hours.



Applications



Cement plants



Quarries and
surface mines

ABRASION RESISTANT

THE ADVANTAGES

- Manufactured by the inventor of the SUPER-SCREW®
- Made in France
- Reduces downtime of your conveyor
- Easy and quick to install (1 to 2 persons)
- Self installation, low investment
- Leak proof and flexible
- Compatible with small pulley diameter
- Compatible with conveyor scrapers



Steel screws and inserts

Steel screws and inserts

High resistance, it's the perfect choice for most applications

Quarries, Cement Plants, Mines, etc.




Technical data

Belt thickness before skiving							mm		3+1	4+1.5	5+1.5	4+2	5+3	6+2	6+3	8+3	10+3							
							inch		1/8'' + 1/32''	5/32'' + 1/16''	5/32'' + 1/16''	5/32'' + 1/16''	5/32'' + 1/8''	1/4'' + 1/16''	1/4'' + 1/8''	5/16'' + 1/8''	3/8'' + 1/8''							
Skiving blades (mm)							3.5		4.5		4.5		4.5	2.5	4.5	3.5	6.5	2.5	6.5	3.5	8.5	3.5	10.5	3.5
Type	Type of belt		Belt tension	Operating tension	Min pulley Ø, mm	Spacer	Screw dimensions																	
			N/mm	PIW																				
35	250/2	250/3	350	200	160	506	5 x 12																	
	315/2	315/3																						
	400/2	400/3																						
63	500/3	500/4	630	360	200	508	5 x 14																	
	630/2	630/3																						
	630/4																							
80	800/2	800/3	800	450	250	5 x 16																		
	800/4																							

		35	63	80
mm	Top Cover Thickness, mm (± 1 mm)	4	5	6
	Bottom Cover Thickness, mm (± 1 mm)	3.7	4	5
inch	Top Cover Thickness, inch	1/8"	3/16"	1/4"
	Bottom Cover Thickness, inch	1/8"	1/8"	3/16"
Width of SUPER-SCREW®, mm (inch)		62 (2 1/2)	110 (4 1/4)	156 (6 1/8)
Width to be skived on trailing edge, mm (inch)		26 (1 1/16)	50 (2)	73 (3)
Width to be skived on leading edge, mm (inch)		36 (1 1/2)	60 (2 3/8)	83 (3 3/8)
Screw Diameter, mm		5		
Screws for 25 m		2750	5000	7000
Spacers for 25 m		250	250	250
PZ2 Bit for 25 m		25	25	25

Packaging

Packaging	35	63	80
Length of SUPER-SCREW®, m	25 m roll		
Spacers / screws / PZ bit	Included		

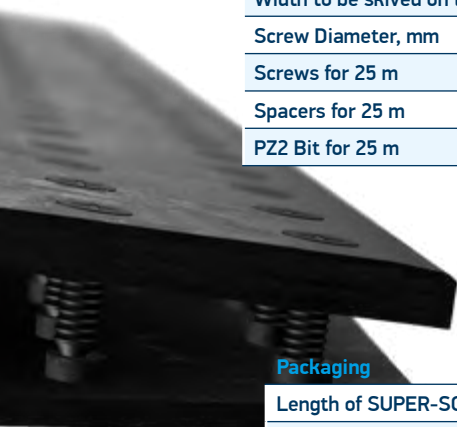

SUPER-SCREW® ORIGINAL

The historical product



MLT is the inventor of the world's first flexible screw splice, created in 1994: the **SUPER-SCREW® ORIGINAL**.

Since then, this permanent endless system has proven its worth all over the world by offering a simple and quick installation in any situation.



Applications



Cement plants



Quarries and
surface mines



Heavy industries



Underground mines

ABRASION RESISTANT

OIL RESISTANT

HEAT RESISTANT*

FIRE RESISTANT

HEAT RETARDANT**

VERY LOW TEMPERATURE

THE ADVANTAGES

- Permanent solution
- Reduces downtime of your conveyor
- Optimizes your productivity
- Easy and quick to install (1 to 2 persons)
- Self installation, low investment
- Leak proof and flexible
- Compatible with small pulley diameter
- Compatible with conveyor scrapers



Types of steel for screws and inserts available

Steel screws and inserts

High resistance, it's the perfect choice for most applications :

Quarries, Cement Plants, Mines, etc.

Stainless steel screws and inserts

For resistance in corrosive and saline applications :

Gold mines, Phosphate mines, Sorting center, Fertilizer plant, Recycling facilities and salt handling



Technical data

Belt thickness before skiving						mm	6+2		6+3		8+3		10+3	
						inch	1/4'' + 3/32''	1/4'' + 1/8''		5/16'' + 1/8''		3/8'' + 1/8''		
Skiving blades (mm)							6.5	2.5	6.5	3.5	8.5	3.5	10.5	3.5
Type*	Type of belt		Belt tension	Operating tension	Min pulley Ø, mm	Spacer	Screw dimensions							
			N/mm	PIW										
85	800/2	800/3	800	450	250	508	5x16 - 5x18							
	800/4													
100	1000/3	1000/4	1000	570	300		5x18 - 5x20							
	1000/5	1000/6												
105	1000/3	1000/4	1000	570	330		5x20 - 5x22							
	1000/5	1000/6												
125	1250/3	1250/4	1250	710	350	612	6.3x19.5 - 6.3x21							
	1250/5	1250/6												
127	1250/3	1250/4	1250	710	400		6.3x21 - 6.3x22.5							
	1250/5	1250/6												
140	1400/3	1400/4	1400	800	350		6.3x19.5 - 6.3x21							
	1400/5													
145	1400/3	1400/4	1400	800	400		6.3x21 - 6.3x22.5							
	1400/5													
160	1600/4	1600/5	1600	914	350		6.3x21 - 6.3x22,5							
	1600/6													
165	1600/4	1600/5	1600	914	400		6.3x22.5 - 6.3x24							
	1600/6													
180	1800/5	1800/6	1800	1030	400		6.3x21 - 6.3x22,5							
185	1800/5	1800/6		1030	500		6.3x22.5 - 6.3x24							
200	2000/5	2000/6	2000	1140	500	614	6.3x22.5 - 6.3x24							
205	2000/5	2000/6		1140	650		6.3x24 - 6.3x25.5							
250	>2000		2500	>1430	800	616	6.3x27 - 6.3x28.5							

*Our splicing solutions have been engineered for normal applications. For tough and abrasive environments, we encourage you to select an upper Super-Screw® size (please check specifications before)

	85	100	105	125	127	140	145	160	165	180	185	200	205	250
mm	7.5	7.5	9	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	8.5	10	10.5
inch	5/16	5/16	3 1/8	1/4	5/16	1/4	5/16	1/4	5/16	1/4	5/16	5/16	3/8	7/16
Top Cover Thickness, mm (± 1 mm)	7.5	7.5	9	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	8.5	10	10.5
Bottom Cover Thickness, mm (± 1 mm)	4.5							6						8
Top Cover Thickness, inch	5/16	5/16	3 1/8	1/4	5/16	1/4	5/16	1/4	5/16	1/4	5/16	5/16	3/8	7/16
Bottom Cover Thickness, inch	3/16							1/4						5/16
Width of SUPER-SCREW®, mm (inch)	156 (6 1/8)							266 (10 1/2)						
Width to be skived on trailing edge, mm (inch)	73 (2 7/8)							126 (4 15/16)						
Width to be skived on leading edge, mm (inch)	83 (3 1/4)							140 (5 1/2)						
Screw Diameter, mm	5							6.3						
	85 - 105					125 - 250								
Length of SUPER-SCREW®	1 m	3 m	5 m	10 m	25 m	1 m	3 m	5 m	7.5 m	15 m				
Number of screws required	280	840	1400	2800	7000	254	762	1270	1905	3810				
Number of PZ Bits required	1	3	5	10	25	1	3	5	8	15				

Packaging

ROLL packaging	85 - 105				125 - 250			
Length of SUPER-SCREW®	3 m roll	5 m roll	10 m roll	25 m roll	3 m roll	5 m roll	7.5 m roll	15 m roll
Spacers / screws / PZ bit	to be ordered separately							
Installation tools	Included							
KIT packaging	85 - 250							
Belt width, mm (inch)	800 (31 1/2)		1000 (39 1/4)		1200 (48)		1400 (55) 1600 (63)	
Length of SUPER-SCREW®	830 (32 3/4)		1045 (41)		1245 (49)		1465 (57 3/4) 1660 (65 1/4)	
Spacers / screws / PZ bit	to be ordered separately							
Installation tools	Included							

*Heat resistant : can be installed in systems with temperatures up to 150°C (302°F) continuous and 170°C (338°F) flash.

**Heat retardant : can be installed on your high temperature belt and will withstand (temperatures) from 170°C continuous (338°F) to 200°C (392°F) flash.

SUPER-SCREW[®]

EVOLUTION

The new generation



In order to always improve innovation, **MLT's** R&D teams have gone beyond the limits of the **SUPER-SCREW[®] ORIGINAL** to create a brand new generation of flexible screw joints, even more flexible and resistant: The **SUPER-SCREW[®] EVOLUTION**.



Applications



Cement plants



Quarries and surface mines



Heavy industries



Underground mines

ABRASION RESISTANT

OIL RESISTANT

FOOD WHITE

HEAT RESISTANT*


FIRE RESISTANT

HEAT RETARDANT**

VERY LOW TEMPERATURE

THE ADVANTAGES

- Permanent solution
- More flexible, more resistant
- Perfect integration into the belt
- Reduce downtime
- Optimizes your productivity
- Easy and quick to install (1 to 2 persons)
- Self installation, low investment
- Leak proof and flexible
- Compatible with small pulley diameter
- Compatible with conveyor scrapers

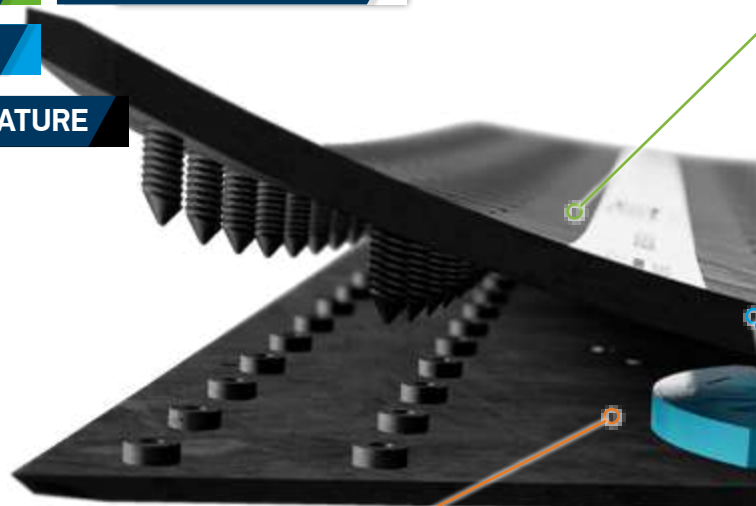

Easier and faster to install

- Easy to cut out the splice
- Less screws for faster Installation
- Easier skiving
- New spacers for equal skiving size on both sides

Types of steel for screws and inserts available

Steel screws and inserts

High resistance, it's the perfect choice for most applications :
Quarries, Cement Plants, Mines, etc.

Stainless steel screws and inserts

For resistance in corrosive and saline applications :
Gold mines, Phosphate mines, Sorting center, Fertilizer plant, Recycling facilities and salt handling



Technical data

Belt thickness before skiving		mm	3+1.5	4+1.5	5+1.5	4+2	5+3	6+2	6+3	8+3
		inch	1/8" +1/16"	5/32" +1/16"	3/16" +1/16"	5/32" +1/16"	3/16" +1/8"	1/4" +1/16"	1/4" +1/8"	5/16" +1/8"
Skiving blades (mm)			3.5	4.5	4.5	4.5 2.5	4.5 3.5	6.5 2.5	6.5 3.5	8.5 3.5
Type*	Type of belt	Belt tension N/mm	Operating tension PIW	Min pulley Ø, mm	Screw dimensions					
35	250/2 250/3 315/2 315/3	350	200	160	5x10 - 5x12					
50***	400/2 400/3 500/3 500/4	630	360	180	5x12 - 5x14					
63	630/2 630/3 630/4			200	5x14 - 5x16					
80	800/2 800/3 800/4	800	450	250						


***SS50 possible for EP630 4+2 belt

Spacers: One size spacer

*Our splicing solutions have been engineered for normal applications. For tough and abrasive environments, we encourage you to select an upper Super-Screw® size (please check specifications before)

Fully integrated

- Smaller pulley diameters
- Better compatibility with scrapers

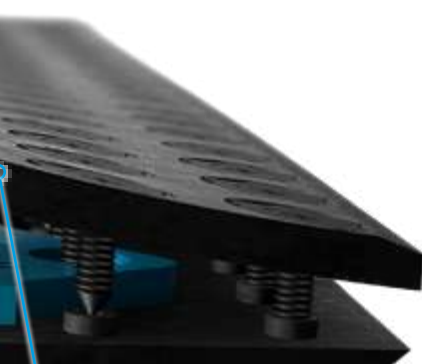

	35	50	63	80		
mm	Top Cover Thickness, mm (± 1 mm)	3.5	4	6	6	
	Bottom Cover Thickness, mm (± 1 mm)	3	3	3	4.7	
inch	Top Cover Thickness, inch	1/8	5/32	1/4	1/4	
	Bottom Cover Thickness, inch	1/8	1/8	1/8	3/16	
	Width of SUPER-SCREW®, mm (inch)	72 (2 ²⁷ / ₃₂)	116 (4 ⁹ / ₁₆)	116 (4 ⁹ / ₁₆)	160 (6 ⁵ / ₁₆)	
	Width to be skived on trailing edge, mm (inch)	37 (1 ¹⁵ / ₃₂)	59 (2 ⁵ / ₁₆)	59 (2 ⁵ / ₁₆)	80 (3 ⁵ / ₃₂)	
	Width to be skived on leading edge, mm (inch)	37 (1 ¹⁵ / ₃₂)	59 (2 ⁵ / ₁₆)	59 (2 ⁵ / ₁₆)	80 (3 ⁵ / ₃₂)	
	Screw Diameter, mm	5				
	Length of SUPER-SCREW®	1 m	3 m	5 m	10 m	25 m
		35				
	Number of screws required	92	276	460	920	2300
	Number of spacers required	4	12	20	40	100
	Number of PZ Bits required	1	1	1	2	2
		50 - 63				
	Number of screws required	184	552	920	1840	4600
	Number of spacers required	4	12	20	40	100
	Number of PZ Bits required	1	1	1	2	2
		80				
	Number of screws required	276	828	1380	2760	6900
	Number of spacers required	4	12	20	40	100
	Number of PZ Bits required	1	1	1	2	2

Packaging

Thinner and more resistant

- Better integration into the belt
- Improved breaking strength
- Higher abrasion resistance
- More flexible splice

ROLL packaging

Length of SUPER-SCREW®	3 m roll	5 m roll	10 m roll	25 m roll	
Installation tools / Spacers / PZ bit	Included				
Screws	to be ordered separately				
KIT packaging	35 - 80				
Belt width, mm (inch)	800 (31 1/2)	1000 (39 1/4)	1200 (48)	1400 (55)	1600 (63)
Length of SUPER-SCREW® mm (inch)	832 (31 3/4)	1057 (41 1/2)	1260 (49 1/2)	1462 (57 1/2)	1665 (65 1/2)
Installation tools / Spacers / PZ bit	Included				
Screws	Included				

PERFECT INTEGRATION

Product specially designed for thin belts

After skiving, perfect integration in the belt

*Heat resistant : can be installed in systems with temperatures up to 150°C (302°F) continuous and 170°C (338°F) flash.

**Heat retardant : can be installed on your high temperature belt and will withstand (temperatures) from 170°C continuous (338°F) to 200°C (392°F) flash.

SUPER-SCREW®

SECURITY

The first splice in the world with a safety indicator



In order to optimize your maintenance and your conveyor downtime, **MLT** teams have revolutionized the world of splicing with the **SUPER-SCREW® SECURITY**, equipped with a **safety indicator**.

This new system allows you to predict and then anticipate the time to change your splice, offering you a considerable reduction in downtime.



Applications



Cement plants



Quarries and surface mines



Heavy industries



Underground mines

ABRASION RESISTANT

OIL RESISTANT

HEAT RESISTANT*


FIRE RESISTANT

HEAT RETARDANT**

VERY LOW TEMPERATURE

THE ADVANTAGES

- Safety: red border visible when the junction must be replaced
- Permanent solution
- Perfect integration in the belt
- Optimizes your productivity
- Easy and quick to install (1 to 2 persons)
- Self installation, low investment
- Leak proof and flexible
- Compatible with small pulley diameter
- Compatible with conveyor scrapers

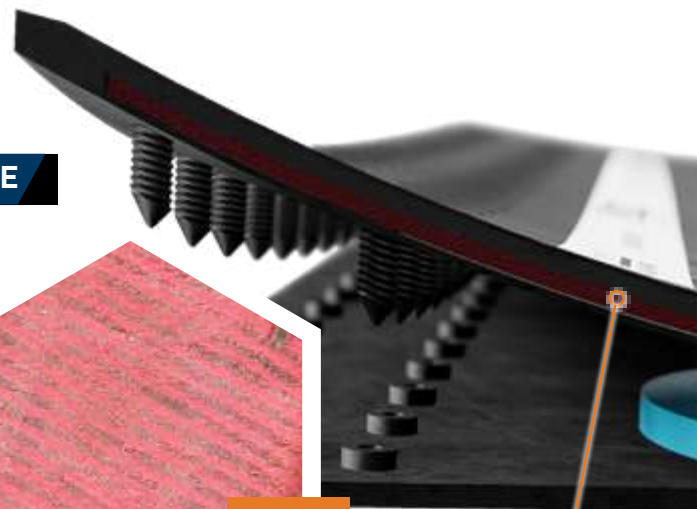

NEW

WITH SAFETY INDICATOR

Types of steel for screws and inserts available

Steel screws and inserts

High resistance, it's the perfect choice for most applications :

Quarries, Cement Plants, Mines, etc.

Stainless steel screws and inserts

For resistance in corrosive and saline applications :

Gold mines, Phosphate mines, Sorting center, Fertilizer plant, Recycling facilities and salt handling



Technical data

Belt thickness before skiving					mm	5+3		6+2		6+3		8+3		10+3	
					inch	3/16'' + 1/8''		1/4'' + 1/16''		1/4'' + 1/8''		5/16'' + 1/8''		3/8'' + 1/8''	
Skiving blades (mm)						4.5	3.5	6.5	2.5	6.5	3.5	8.5	3.5	10.5	3.5
Type*	Type of belt		Belt tension	Operating tension	Min pulley Ø, mm	Screw dimensions									
			N/mm	PIW											
65	630/2	630/3	630	360	200	5x14 - 5x16									
	630/4														
85	800/2	800/3	800	450	250	5x16 - 5x18									
	800/4														
100	1000/3	1000/4	1000	570	300	5x18 - 5x20									
	1000/5	1000/6													
105	1000/3	1000/4	1000	570	350	5x20 - 5x22									
	1000/5	1000/6													

Spacers: One size spacer

*Our splicing solutions have been engineered for normal applications. For tough and abrasive environments, we encourage you to select an upper Super-Screw® size (please check specifications before)

		65		85		100		105	
mm	Top Cover Thickness, mm (± 1 mm)	6		8		8		10	
	Bottom Cover Thickness, mm (± 1 mm)	3				4.7			
inch	Top Cover Thickness, inch	1/4		5/16		5/16		3/8	
	Bottom Cover Thickness, inch	1/8				3/16			
	Width of SUPER-SCREW®, mm (inch)	116 (4 ^{9/16})				160 (6 ^{5/16})			
	Width to be skived on trailing edge, mm (inch)	59 (2 ^{5/16})				80 (3 ^{1/8})			
	Width to be skived on leading edge, mm (inch)	59 (2 ^{5/16})				80 (3 ^{1/8})			
	Screw Diameter, mm					5			
	Length of SUPER-SCREW®	1 m	3 m	5 m	10 m	15 m***	25 m		
		65							
	Number of screws required	184	552	920	1840			4600	
	Number of spacers required	4	12	20	40			100	
	Number of PZ Bits required	1	1	1	2			2	
		85 - 105							
	Number of screws required	276	828	1380	2760	4140	6900		
	Number of spacers required	4	12	20	40	60	100		
	Number of PZ Bits required	1	1	1	2	2	2		

Packaging

ROLL packaging	65 - 105				
Length of SUPER-SCREW®	3 m roll	5 m roll	10 m roll	15 m*** roll	25 m roll
Installation tools / Spacers / PZ bit	Included				
Screws	to be ordered separately				
KIT packaging	65 - 105				
Belt width, mm (inch)	650 (25 1/2)	800 (31 1/2)	1000 (39 1/4)	1200 (48)	1400 (55)
Length of SUPER-SCREW® mm (inch)	675 (26 1/2)	832 (31 3/4)	1057 (41 1/2)	1260 (49 1/2)	1462 (57 1/2)
Installation tools / Spacers / PZ bit	Included				
Screws	Included				

***Note : SUPER-SCREW® SECURITY 105 only, for this model, maximum length of roll is 15 m.



NEW
SAFETY
INDICATOR

*Heat resistant : can be installed in systems with temperatures up to 150°C (302°F) continuous and 170°C (338°F) flash.

**Heat retardant : can be installed on your high temperature belt and will withstand (temperatures) from 170°C continuous (338°F) to 200°C (392°F) flash.

SUPER-SCREW[®]

P R E M I U M

The only flexible screw splice in **POLYURETHANE**



In order to meet the most extreme environments and the most demanding requirements, **MLT** created the **SUPER-SCREW[®] PREMIUM** : the first **flexible splice to screw in POLYURETHANE**, designed for extremely abrasive applications*.

The polyurethane that composes the upper part of this new **SUPER-SCREW[®]** splice provides a considerable gain in abrasion resistance (15 mm³), while maintaining the flexibility, perfect integration and strength of **SUPER-SCREW[®]**.



Applications



Cement plants



Quarries and
surface mines



Heavy industries

POLYURETHANE

UNIQUE ON THE MARKET

VERY HIGH ABRASION RESISTANCE (15 mm³)

THE ADVANTAGES

- Very high abrasion resistance (15 mm³)
- Polyurethane: reduced friction
- Permanent solution
- Reduces downtime of your conveyor
- Optimizes your productivity
- Easy and quick to install (1 to 2 persons)
- Self installation, low investment
- Leak proof and flexible
- Compatible with small pulley diameter
- Compatible with conveyor scrapers

Upper part in Polyurethane

Bottom part in rubber


Types of steel for screws and inserts available



Steel screws and inserts

High resistance, it's the perfect choice for most applications :

Quarries, Cement Plants, Mines, etc.



*Only compatible with applications with anti-abrasive and oil-resistance requirements

Technical data

Belt thickness before skiving				mm	6+2		6+3		8+3		10+3		
				inch	1/4'' + 1/16''		1/4'' + 1/8''		5/16'' + 1/8''		3/8'' + 1/8''		
Skiving blades (mm)					6.5	2.5	6.5	3.5	8.5	3.5	10.5	3.5	
Type*	Type of belt		Belt tension	Operating tension	Min pulley Ø, mm	Screw dimensions							
			N/mm	PIW									
65 - 6mm	630/2	630/3	630	360	200	5x14 - 5x16							
	630/4												
65 - 8mm	630/2	630/3				230	5x16 - 5x18						
	630/4												
85 - 8mm	800/2	800/3	800	450	250	5x16 - 5x18							
	800/4												
85 - 10mm	800/2	800/3				300	5x18 - 5x20						
	630/4												
105 - 8mm	1000/3	1000/4	1000	570	300	5x18 - 5x20							
	1000/5	1000/6											
105 - 10mm	1000/3	1000/4				350	5x20 - 5x22						
	1000/5	1000/6											

Spacers: One size spacer
 *Our splicing solutions have been engineered for normal applications. For tough and abrasive environments, we encourage you to select an upper Super-Screw® size (please check specifications before)

		65 - 6mm	65 - 8mm	85 - 8mm	85 - 10mm	105 - 8mm	105 - 10mm
mm	Top Cover Thickness, mm (± 1 mm)	6	8	8	10	8	10
	Bottom Cover Thickness, mm (± 1 mm)	3			4.7		
inch	Top Cover Thickness, (inch)	1/4	5/16	5/16	3/8	5/16	3/8
	Bottom Cover Thickness, (inch)	1/8			3/16		
	Width of SUPER-SCREW®, mm (inch)	116 (4 9/16)			160 (6 5/16)		
	Width to be skived on trailing edge, mm (inch)	58 (2 5/16)			80 (3 1/8)		
	Width to be skived on leading edge, mm (inch)	58 (2 5/16)			80 (3 1/8)		
	Screw Diameter, mm	5					

Packaging

KIT packaging

	65 - 105				
Belt width, mm (inch)	650 (25 1/2)	800 (31 1/2)	1000 (39 1/4)	1200 (48)	1400 (55)
Length of SUPER-SCREW®, mm (inch)	675 (26 1/2)	832 (31 3/4)	1057 (41 1/2)	1260 (49 1/2)	1462 (57 1/2)
Screws / Installation tools / Spacers / PZ bit	Included				



EVEN FASTER

EASY SCREW SOLUTION

NEW

In order to optimize screwing time of the **SUPER-SCREW® PREMIUM** splice, **MLT** created **Easy Screw Solution**. This system of screws pre-positioning will allow you to save even more time in your belt splicing.



SUPER-SCREW

PATENTED PRODUCT
MADE IN FRANCE

MLT Minet Lacing Technology

More than 70 years of innovation
at your service



Distributor logo

 **MLT GROUP**
Conveyor Solutions Expert

 **MLT GROUP**
Minet Lacing Technology

 **TECHNICGUM**
MLT GROUP

www.mltgroup-conveyor.com - info@mltgroup-conveyor.com