

Abrasion wear has met its match

REMALOX



REMA TIP TOP has been solving wear problems in a variety of plant operations for several decades now. In that time we have seen the worst of applications with sliding abrasion problems. That is what led us to develop our **REMALOX** product.


REMALOX is a high abrasion resistant rubber panel with high quality 92% alumina oxide tiles imbedded into it. This combination delivers superior abrasion resistance plus an impact cushion. This cushioning effect helps protect the tiles from impact blows that could otherwise crack most ceramic tiles.

With the ceramic tiles being nearly as hard as diamonds they can handle your wet/dry sliding abrasion problems. This same feature also prevents wet sticky material from building up and creating caking problems.

The tiles have an extremely high bond strength to the rubber backing so they stay in place.



Remalox being installed in a coal hopper

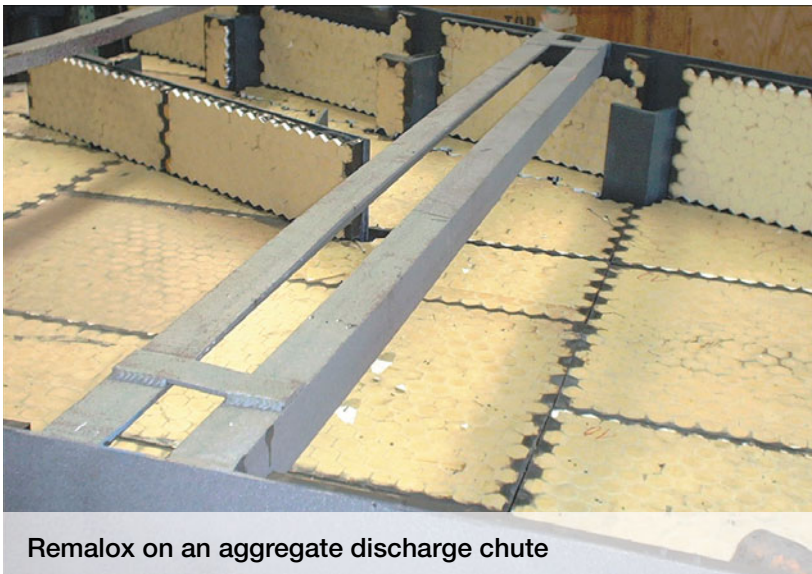

Remalox on an aggregate discharge chute

REMALOX is manufactured with **REMA TIP TOP's** proven CN bonding layer so it can be applied, using our cold bond adhesive system, to a variety of surfaces. Remalox can be applied directly to the structural surface where the problems are occurring or it can be bonded to steel plate and then welded or bolted into place.

REMA TIP TOP representatives are available to inspect your applications and make a recommendation. With a large nationwide network of distributors and 8 Service Centers across the country we are close by and can respond in a hurry. Contact us today at **1-800-334-REMA**.



ONE BRAND – ONE SOURCE – ONE SYSTEM

Abrasion wear has met its match

REMALOX



Properties

Product Characteristics	<ul style="list-style-type: none">• Long lasting protection against abrasion means more up time service• Low co-efficient of friction significantly reduces caking problems• CN bonding layer on back means highest bond strength to substrate
Applications	Wet, sticky, caking or dry sliding abrasion problems.
Panel size	20" x 20.5" x 1"
Tile size	1¼" x ½"
Tile shape	Hexagon
Rubber	Isoprene/Butadiene
Weight/panel	32 lbs. (nominal)

**REMA TIP TOP/North America Inc
Industrial Division**

1500 Industrial Blvd.
Madison, GA 30650

Toll Free: 800.334.REMA (7362)
Phone: 706.752.4000
Fax: 706.752.4015
www.rematiptop.com



ONE BRAND – ONE SOURCE – ONE SYSTEM